




## Dry Floors, Circulate and Exhaust Air

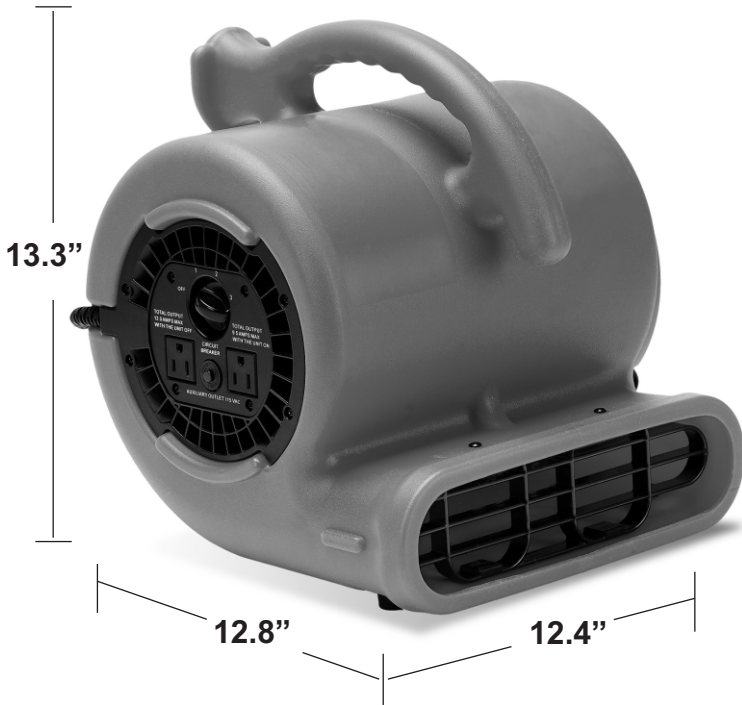

The new Hawk BVP25D air mover is designed for small to medium size jobs and for ventilating hard to reach areas with a 1/4 HP induction motor. The 3-speed motor moves air up to 900 CFM.

Two 12 Amp GFCI grounded auxiliary power outlets on the side-mounted control panel. Up to 5 unit daisy chain capability. Quiet - 67 dB

### Engineered Design

- 3-Speed, 1/4 HP motor with 10 ft. 14 AWG power cord
- 3-speed switch and circuit breaker on control panel
- Up to 900 CFM air flow.
- Two 12 Amp GFCI grounded auxiliary power outlets on the side-mounted control panel. GFCI reduce the risk of electric shock in wet areas and is required by insurance companies paying for water flood cleanup claims.
- Daisy chain in-line connection of up to 5 units for more effective air flow
- Strong Roto-Molded chassis has a profile that allows for vertical stacking of up to 5 units for convenient storage
- Ergonomic handle for easy transport
- Lightweight 11.3 lbs.
- Quiet operation - 67 dB
- C-ETL-US certification



### HAWK BVP25D 900 CFM Air Mover

Specifications	
Model	BVP25D
Motor	1/4 HP, 115V, 60Hz
Air Volume	900 CFM (High), 700 CFM (Med), 690 CFM (Low Speed)
Amp Draw	2.1 Amp (High), 1.8 Amp (Med), 1.7 Amp (Low Speed)
Air Flow Direction	0, 45 and 90 degrees
Max Static Pressure	1.3"
Frame Construction	Sturdy Rotomolded Plastic
Stackable	5 units
Daisy Chain	Yes - Up to 5 Units
Weight	11.3 lbs. (net) / 12.6 lbs. (gross)
Size (LxWxH)	12.8" x 12.4" x 13.3"
Attached Cord	10 Ft. 14 AWG
Sound Level	67 dB
Certification	C-ETL-US

Subject to Change Without Notice



Side Mount  
3-Speed Switch and  
Dual GFCI Power Outlets



Daisy Chain up to  
5 Units for Extra Air  
Moving Power



Air Flow in 3 Angles  
0, 45 & 90 Degrees



Works in Tight Spaces for  
Tough Drying Jobs