




Dry Floors, Circulate and Exhaust Air

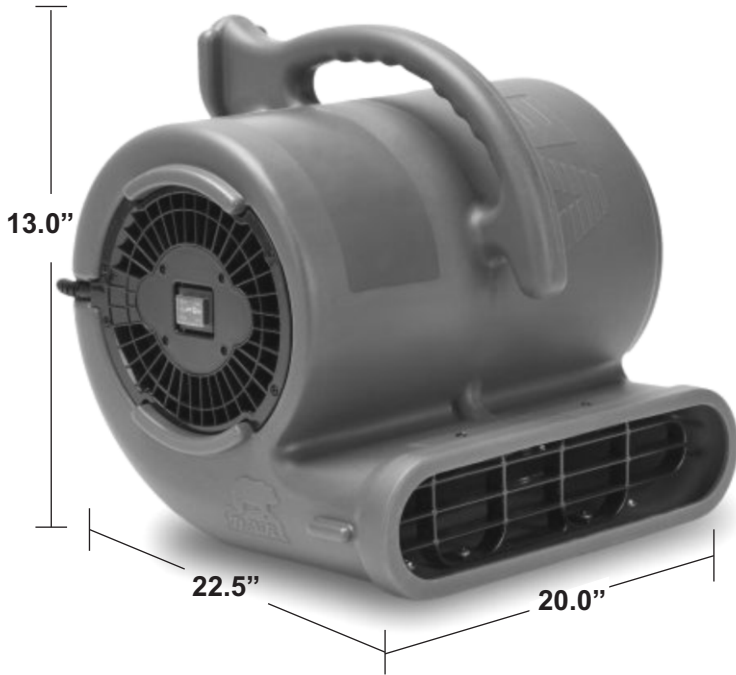

BVP50 Air Mover is the safest and most efficient centrifugal unit on the market. Our 1/2 HP motor generates up to 2820 CFM with just 4.5 amps usage. Control the CFM and Amp draw with the state of the art 2-speed moisture resistant switch. The rotomolded body is stronger, lighter and capable of stacking 5 high in storage. The model BVP50H adds transport wheels and a telescoping handle.

Engineered Design

- 2-Speed, 1/2 HP motor produces up to 2820 CFM airflow
- A sealed motor design prevents moisture from entering and damaging internal motor components
- 25 ft. 16 AWG power cord
- The side-mounted 2-speed switch is moisture resistant
- Sturdy rotomolded plastic design has a profile that allows for vertical stacking up to 5 units for convenient storage
- The BVP50 multipurpose design directs air at 3 angles (horizontally, 45° and 90°).
- The BVP50H adds a telescoping handle and transport wheels. Use horizontally, or tip back 90 degrees and move air straight upward.
- A plastic cage protects motor and fans from debris
- C-ETL listed



HAWK BVP50
2820 CFM Air Mover

HAWK BVP50H
with Handle and
Transport Wheels



Specifications

Model	BVP50, BVP50H (with Telescoping Handle & Wheels)
Motor	1/2 HP, 115V, 60Hz Sealed Motor
Air Volume	2820 CFM (High Speed) / 2390 CFM (Low Speed)
Amp Draw	4.5 Amp (High Speed) / 2.8 Amp (Low Speed)
Max Static Pressure	2.5"
Air Flow Direction	0, 45 and 90 degrees
Frame Construction	Sturdy Rotomolded Plastic
Stackable	5 units
Weight	25 lbs. (net) / 28 lbs. (gross)
Size (LxWxH)	22.5"x 20"x 13"
Attached Cord	25 Ft. 16 AWG
Sound Level	74 dB
Certification	C-ETL-US

Subject to Change Without Notice




Store Up To
5 Stacked Units



BVP50H Adds Dual
Transport Wheels and
Telescoping Handle



Direct Airflow at 3 Angles
(Horizontally, 45° and 90°).



Quiet Janitorial Jobs
74 dB at High Speed